

LT-23/30-TB Electric

VW AMAROK 4 X 4 WB 3095



TIME

LT-23/30-TB

SPECIFICATION

	LT-23-TB	LT-30-TB
Working height	9.2 m	11.2 m
Platform height	7.2 m	9.2 m
Max. working outreach	4.2 / 4,2 m	4.7 / 4.2 m
Max. bucket capacity	120 / 200 kg	120 / 200 kg
Flyboom	-	-
Minimum GVW of the vehicle	3040 kg	3040 kg

* Depending on vehicle

STANDARD

AEP: Access Environmental Powerpack

TMS: Topmounted subframe

NO: No Outriggers

EHP: Emergency Hand Pump

2 Man French walk-in bucket

Bucket center stowe without platform

LH: Left Hand prop. Control

OPTIONS

1 set A-Frame Outriggers

ES: Emergency pump system

2 man Aluminium walk in bucket

Axel lock (Standard at 200 kg)



VP: 230 V connection to platform

Flash on turret

SJC: Single Joystick prop. Control

TSS: Tilt Sensing System

NOTE

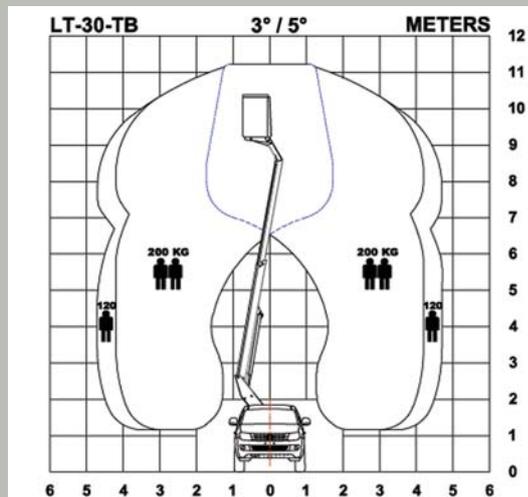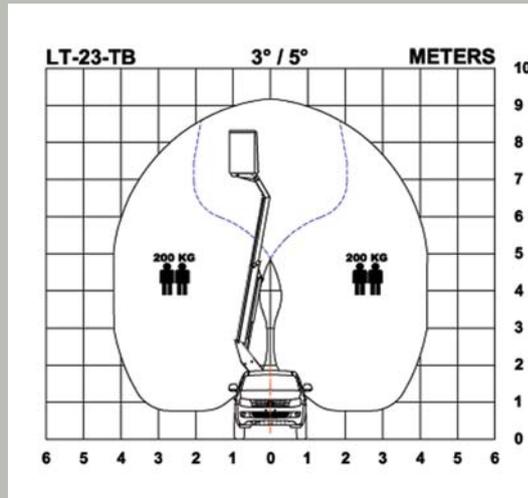

LT-23-30-TB_Amarok/C257/2012-02/EN



INTERNATIONAL A/S

Søndervang 3 - DK-9640 Farsø

Phone +45 9863 2433 - Fax +45 9863 2483

sales@TIMEintl.dk - www.TIMEintl.dk